




Telescopic Spot Lights





ROCA15095

LED Chip: COB
 Size: $\phi 60 * \phi 108 * 72 + 99\text{mm}$
 Cutout: $\phi 95\text{mm}$
 Input: 220~240VAC 50/60Hz
 Wattage: 10W
 Beam Angle: 15°/24°/36°
 CCT: 2700-5500K
 RA ≥ 90



$\phi 95\text{mm}$




ROCA25120

LED Chip: COB
 Size: $\phi 77 * \phi 138 * 92 + 118\text{mm}$
 Cutout: $\phi 120\text{mm}$
 Input: 220~240VAC 50/60Hz
 Wattage: 20W
 Beam Angle: 15°/24°/36°
 CCT: 2700-5500K
 RA ≥ 90



$\phi 120\text{mm}$

Telescopic Spot Lights




ROCA35140

LED Chip: COB
 Size: $\phi 93 * \phi 158 * 112 + 142\text{mm}$
 Cutout: $\phi 145\text{mm}$
 Input: 220~240VAC 50/60Hz
 Wattage: 25W
 Beam Angle: 15°/24°/36°
 CCT: 2700-5500K
 RA ≥ 90



$\phi 145\text{mm}$



Adjustable



Certificate mark



IP rating



Different light distributions



Tri-color



Excellent visual comfort



Adjustable



Certificate mark



IP rating



Different light distributions




Tri-color



Excellent visual comfort



Down Light


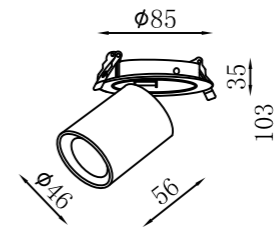


ROCAM09075

LED Chip: COB
Size: $\phi 46 * \phi 85 * 103$ mm
Cutout: $\phi 75$ mm
Input: 220~240VAC 50/60Hz
Wattage: 9W
Beam Angle: 15°/24°/50°
CCT: 2700-5500K
RA \geq 90






$\phi 75$ mm





Down Light

Down Light

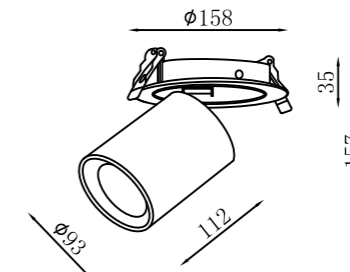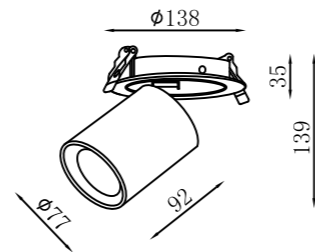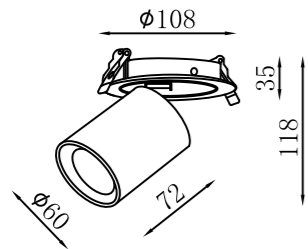

ROCAM15095

ROCAM25120

ROCAM35140

LED Chip: COB
 Size: $\phi 60 * \phi 108 * 118\text{mm}$
 Cutout: $\phi 95\text{mm}$
 Input: 220~240VAC 50/60Hz
 Wattage: 15W
 Beam Angle: 15°/24°/36°
 CCT: 2700-5500K
 RA ≥ 90

LED Chip: COB
 Size: $\phi 77 * \phi 138 * 139\text{mm}$
 Cutout: $\phi 120\text{mm}$
 Input: 220~240VAC 50/60Hz
 Wattage: 25W
 Beam Angle: 15°/24°/36°
 CCT: 2700-5500K
 RA ≥ 90

LED Chip: COB
 Size: $\phi 93 * \phi 158 * 157\text{mm}$
 Cutout: $\phi 145\text{mm}$
 Input: 220~240VAC 50/60Hz
 Wattage: 35W
 Beam Angle: 15°/24°/36°
 CCT: 2700-5500K
 RA ≥ 90





$\phi 95\text{mm}$



$\phi 120\text{mm}$



$\phi 145\text{mm}$



Adjustable



Certificate mark



IP rating



Different light distributions



Tri-color



Excellent visual comfort



Adjustable



Certificate mark



IP rating



Different light distributions



Tri-color



Excellent visual comfort




Smart S






Grille Light

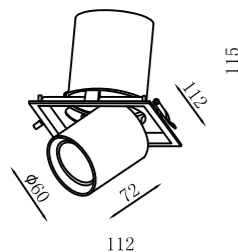


ROCA9595

LED Chip: COB
 Size: ϕ 60*72*mm
 Cutout: 95x95mm
 Input: 220~240VAC 50/60Hz
 Wattage: 1x15W
 Beam Angle: 15°/24°/36°
 CCT: 2700-5500K
 RA \geq 90




95x95mm

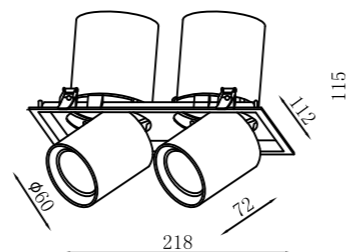


ROCA95195

LED Chip: COB
 Size: 2* ϕ 60*72mm
 Cutout: 95x195mm
 Input: 220~240VAC 50/60Hz
 Wattage: 2x15W
 Beam Angle: 15°/24°/36°
 CCT: 2700-5500K
 RA \geq 90




95x195mm

Grille Light

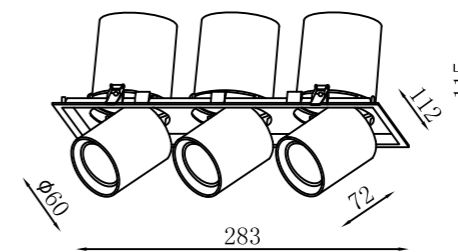


ROCA95265

LED Chip: COB
 Size: 3* ϕ 60*72mm
 Cutout: 95x265mm
 Input: 220~240VAC 50/60Hz
 Wattage: 3x15W
 Beam Angle: 15°/24°/36°
 CCT: 2700-5500K
 RA \geq 90



95x265mm



Adjustable



Certificate mark



IP rating



Different light distributions



Tri-color



Excellent visual comfort



Adjustable



Certificate mark



IP rating



Different light distributions




Tri-color



Excellent visual comfort




Grille Light




ROCA120120

LED Chip: COB
 Size: ϕ 77*92mm
 Cutout: 120x120mm
 Input: 220~240VAC 50/60Hz
 Wattage: 1x25W
 Beam Angle: 15°/24°/36°
 CCT: 2700-5500K
 RA \geq 90




120x120mm

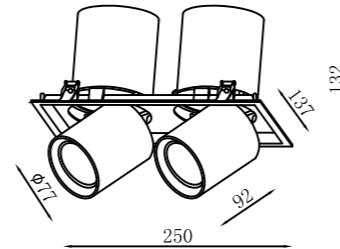


ROCA120235

LED Chip: COB
 Size: 2* ϕ 77*92mm
 Cutout: 120x235mm
 Input: 220~240VAC 50/60Hz
 Wattage: 2x25W
 Beam Angle: 15°/24°/36°
 CCT: 2700-5500K
 RA \geq 90




120x235mm

Grille Light

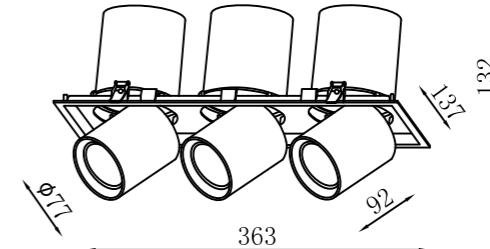


ROCA120345

LED Chip: COB
 Size: 3* ϕ 77*92mm
 Cutout: 120x345mm
 Input: 220~240VAC 50/60Hz
 Wattage: 3x25W
 Beam Angle: 15°/24°/36°
 CCT: 2700-5500K
 RA \geq 90



120x345mm



Adjustable



Certificate mark



IP rating



Different light distributions



Tri-color



Excellent visual comfort



Adjustable



Certificate mark



IP rating



Different light distributions




Tri-color



Excellent visual comfort





Grille Light





ROCA160160

LED Chip: COB
 Size: ϕ 93*112mm
 Cutout: 160x160mm
 Input: 220~240VAC 50/60Hz
 Wattage: 1x35W
 Beam Angle: 15°/24°/36°
 CCT: 2700-5500K
 RA \geq 90

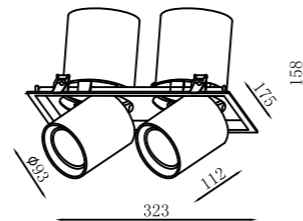




ROCA160305

LED Chip: COB
 Size: 2* ϕ 93*112mm
 Cutout: 160x305mm
 Input: 220~240VAC 50/60Hz
 Wattage: 2x35W
 Beam Angle: 15°/24°/36°
 CCT: 2700-5500K
 RA \geq 90

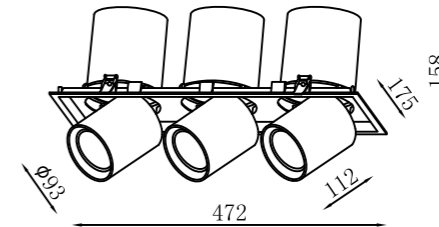

ROCA160450

LED Chip: COB
 Size: 3* ϕ 93*112mm
 Cutout: 160x450mm
 Input: 220~240VAC 50/60Hz
 Wattage: 3x35W
 Beam Angle: 15°/24°/36°
 CCT: 2700-5500K
 RA \geq 90



Adjustable



Certificate mark



IP rating



Different light distributions



Tri-color



Excellent visual comfort



Adjustable



Certificate mark



IP rating



Different light distributions



Tri-color



Excellent visual comfort